

# INNOV8 EQUIPMENT

## URBAN LIGHTING TOWER

Introducing the Urban Lighting Tower, a leader in innovation and technology bringing users superior visibility. Its strong body and exceptional design can withstand tough conditions while maintaining quality performance.



**POWERFUL  
ILLUMINATION**

**QUIET  
OPERATION**

**INBUILT SAFETY  
MECHANISMS**

**BUILT TO HIGHEST  
STANDARDS**


**Contact INNOV8 Equipment today**

E: [sales@innov8equipment.com.au](mailto:sales@innov8equipment.com.au)

P: 1300 071 007

[www.innov8equipment.com.au](http://www.innov8equipment.com.au)

# TECHNICAL DATA

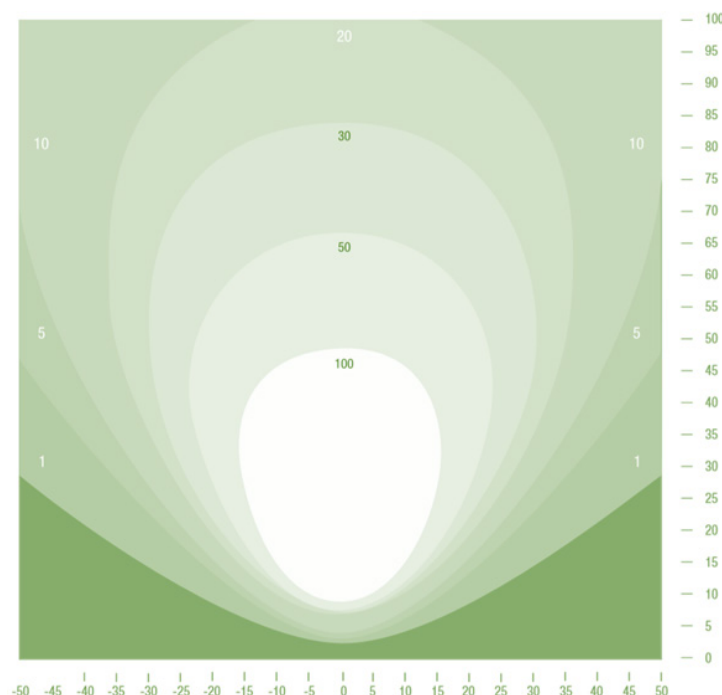

## SMART CONTROLS

The Urban Lighting Tower incorporates SMART GEN INNOV8 Cloud design for remote programming, whereby towers can be controlled through the user friendly iPhone or Android app.



Height	2.56m (8'4")
Length	2.43m (7'9")
Width	1.52m (4'9")
with stabilisers deployed	2.22m (4'9")
Weight	1200kg (2645.5lb)
Voltage	48 V DC
LED Lamps	4 x 500 watt
Lamp Model	KUE4
Lumens	200000
Engine Make and Model	KUBOTA D905
Fuel Type	Diesel
BIO Fuel Compatability	D5
Cooling System	Water Cooled
Engine Aspiration	Naturally
Alternator Brand	Meccalte
Alternator Model	LT3N-130/4
Controller	Smartgen ALC708
Alternator	Brushless
Alternator Insulation	H
Fuel Tank Capacity	100L
Mast Raise Operation	Hydraulic
Number of Mast Sections	8
Mast Rotation	359 Degree Manual operation
Light Tilt	Electric
Trailer Suspension System	Rubber Torsion Axle (Al-ko)
Trailer Attachment	Ball
Tire Rim Size	14"
Acoustic Pressure	65dB(A) @ 7M
Container Load Capacity	40'HC 8
GPO's	2 x 10amp
Braking System	Inertia drum braking with stable towing height, parking brake.
Wind Speed Rating	100km/hr
Optional	Next G asset remote communications

**Contact INNOV8 Equipment today**

E: [sales@innov8equipment.com.au](mailto:sales@innov8equipment.com.au)

P: 1300 071 007

[www.innov8equipment.com.au](http://www.innov8equipment.com.au)